



**SPARTAN** Power  
Solutions



# Industrial Range

## Perkins Series

### Model SP110 Generator set



## General Performance Data

Prime Power	100KVA/80KW
Stand by Power	110KVA/88KW
Frequency/Speed	50Hz/1500rpm
Rated Power Factor(cosφ)	0.8
Standard Voltage	230V/400V
Phases	3



Engine	Brand	Perkins
	Model	1104C-44TAG2
Control module	Deepsea 6120	
Rated Current	144A	
Capacity of Breaker	160A	
Starting Voltage	DC12V	

## Fuel consumption

Rated output	Fuel consumption rate	
100%Standby	-	24.9L/h
100%Prime	-	22.6L/h
75%Prime	-	17.1L/h
50%Prime	-	11.8L/h
25%Prime	-	-

## Standards followed

ISO9001	ISO14001
ISO8528	ISO12100
ISO13849	EN12601
GB12786	GB/T2820
IEC60034	IEC60204
CE	RETIE

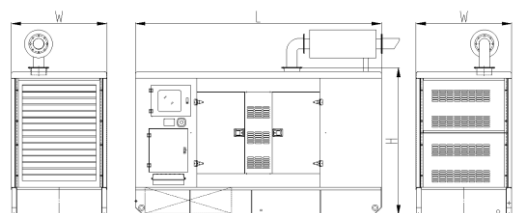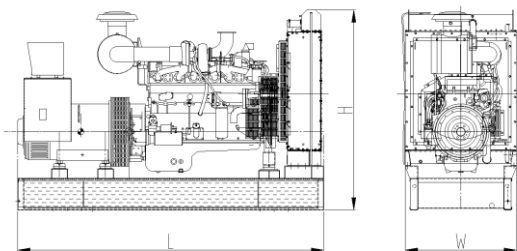

## Dimensions and Weights

Type	Open	Silent
Length(mm)	2050	2800
Width(mm)	800	1100
Height(mm)	1290	1720
Weight(kg)	1080	1650
Base fuel tank volume (L)	170	170

## Engine specification

### Basic parameter

Manufacturer	Perkins
Model	1104C-44TAG2
No. of cylinder	4
Type	4 cycle, Vertical In-line
Prime Power	93.6kw /127.3HP
Standby Power	103kw /140HP
Induction system	Turbocharged, air-to-air charge cooled
Governor	Mechanical/electronic
Bore x Stroke	105x127mm
Displacement	4.4L
Compression ratio	18.23:1
Oil Capacity(Total)	8.0L
Coolant Capacity(Engine only)	12.6L
Cranking Motor Voltage	DC.12V/24V options

### Fuel System

Type Injection system	Indirect injection
Min. Allowable flow of fuel to fuel pump	24.9 L/h

### Lubrication system

Oil Pressure	
---Idle speed	276kPa
---Rated speed	Min 414kPa
Max. allowable oil temperature	125°C
Oil Pan capacity - Low/High	5.5L/7.0L
Total system capacity	8.0L
Angularity of oil pan-Front Down	30°

### Air induction system

Maximum allowable intake air restriction	
---with clean filter element	5.0kPa
---with dirty filter element	8.0kPa
---air filter type	2 stage cyclonic/paper element

### Exhaust system

Max. allowable back pressure	18.0kPa
Standard exhaust pipe diameter	64mm

### Cooling system

Coolant capacity	
---Engine only	7.0L
---Total system	12.6L
---With heat exchanger	-
Standard thermostat(modulating) range	82-93 °C
Max. coolant temperature	110 °C
Max. allowable top tank temperature for stand by/prime power	110 °C

### Electric system

Min. recommended battery capacity (12V)	
---10°C(50°F) & above- 0°F CCA	770A
--- 0°C(32°F) to 10°C(50°F)- 0°F CCA	770A
---18°C(0°F) to 0°C(32°F)- 0°F CCA	770A
Minimum cranking speed	80 rev/min
Starter(heave,Anode)	DC12V
Battery recharge system, negative ground	65ampere


## Alternator specification

Phases	3	Coating	Vacuum impregnation
Poles	4	Insulation class	H
Power factor(cosφ)	0.8	Protection	IP23
Winding connection	Star	Excitation system	Self-excited
Winding pitch	2/3	Bearing	Single Bearing
Voltage regulator type	AVR	Coupling	Flexible disc

# Control system Introduction

## Deepsea 6120 Auto start & auto mains failure control panel

**Deepsea 6120** is an auto mains failure controller for single generator, it can monitor and protect the generator working all the time. it has a LCD display which clearly shows the status of the engine. this controller include seven inputs and six outputs. This controller can also be programmed using the front panel or by using DSE configuration Suite PC software

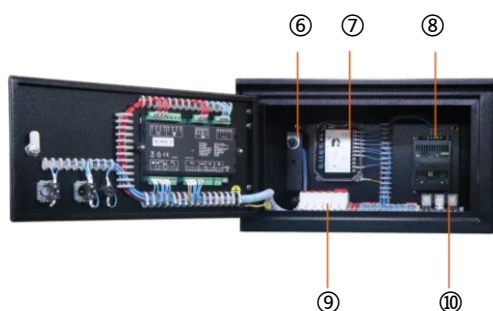

## Key Features:

- Auto start/stop, load transfer and alarming of generator
- Remote start on or off load
- With hierarchical loading function
- Multiple start/stop cycles can be preset
- 3 phase generator and mains voltage monitoring.
- Generator/load power detection(kW, kVA, kVA<sub>r</sub> PF)
- Overload protection (kW)
- Load current monitoring and protection
- Engine speed protection
- Engine pre-heat
- Engine start idle & stop idle
- Battery voltage monitoring
- Start under the low battery
- 4 active outputs
- 4 digital inputs and 3 analogue inputs.
- 6 Custom digital input
- 6 outputs(4 configurable on magnetic pick-up, 6 configurable on Canbus version)
- DSE2130,DSE2157,DSE2548 expansion module can be connected
- Support 0-10V or 4-20mA oil pressure sensor

## Main features:

- Multi language display
- Mains failure self starting
- The running time of the engine can be recorded to facilitate the maintenance and repair of the unit
- User-friendly set-up and button layout
- LCD display can display multiple parameters at the same time
- Support EFI engine
- IP65 rating (with optional gasket)
- PC and front panel configuration
- 100 event records
- Data recording and trend analysis

## Protection:

- Two sets of protection parameters can be preset
- Normal alarm, electrical trip and shutdown alarm can be set to effectively monitor the engine speed,oil pressure, water temperature and oil level, as well as the frequency, voltage, current and power of the alternator, for complete engine/alternator protection
- Low Oil Pressure
- High water Temperature
- High voltage and low voltage
- Overspeed
- Emergency stop
- Fail to start

## Soundproof Canopy Introduction:

### Standard Type :

- The arc angle structure makes the appearance beautiful and not easy to bump
- High quality coating powder, chemical surface treatment & 100-120um coating thickness greatly improving the anti-corrosion and anti rust level
- Stainless steel hinge & door lock are beautiful and anti-rust
- 2.0mm cold rolled plate used makes the body more solid
- The bottom forklift and loading port design enables easy loading and unloading
- The drainage outlets are all connected to the outside for easy operation
- The sufficient air in & out design ensure long-term and stable operation of the unit
- Isolation net is designed for air inlet, exhaust outlet and muffler outlet to prevent objects from entering the unit
- High density foam used inside effectively reduces noise
- Ceiling Lighting is equipped for easy operation
- The built-in base fuel tank with fuel filler set on the shell facilitates refueling
- Models above medium power range are designed with top hoisting mechanism to facilitate transportation of the unit.

### Imitated container type :

- The shell is made of 3.0mm hot rolled steel plate so as to withstand the lifting capacity of 15-ton without deformation
- The switch cabinet and control panel are respectively set on both sides of the shell for easy maintenance & operation
- The shell looks similar to standard container, and can be loaded into 40HQ container for transportation, which is convenient for shipping
- The lifting eye holes are designed on the top same as the standard container for easy handling
- High density foam used inside effectively reduces noise
- The built-in base fuel tank with fuel filler set on the shell facilitates refueling
- Double emergency stop button set on different surfaces enables quick response to operation requirements
- The shell base is independent from the unit with 3mm thick checkered steel plate floor, which is beautiful & antiskid, and is convenient for overhaul & maintenance of the unit
- The door handle, lock and hinge are all made of stainless steel to avoid rusting
- The air out louver made of the mesh plate with powder coating and pasted with high-density glass fiber is beautiful and not easy to rust, and can further reduce the noise
- Isolation net is designed for air inlet, exhaust outlet and muffler outlet to prevent objects from entering the unit
- The sufficient air in & out design ensure long-term and stable operation of the unit
- The drainage outlets are all connected to the outside for easy operation
- Ceiling Lighting is equipped for easy operation

### Classics Economic series :


- Right angle around the canopy
- Carbon spray hinges and lock with rust proof
- The drainage & lubricating oil outlets are all connected to the outside for easy to maintain
- The air inlet and outlet are designed with grid structure of to prevent big objects from entering the canopy
- The lifting lug on the top for medium range genset makes easily and convenient transportation
- High-quality powder coated, chemical surface treatment & 80-120um coating thickness is highly durable against erosion and scratch
- The bottom forklift is built-in base frame for small range genset, with over stow capacity
- The fuel inlet on the canopy is for easy to fuel filling
- High-density sponge to effectively reduce noise



Classics Economic Canopy Sample Picture



Standard supply scope:

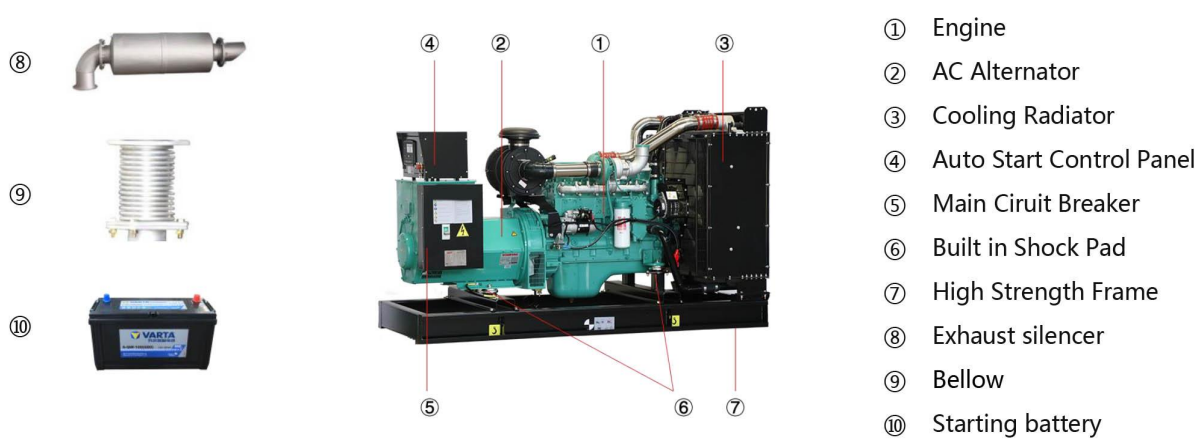

Optional supply scope:

Genset	Engine	Alternator	Control system
<ul style="list-style-type: none"><li>• Tool box</li><li>• Base fuel tank</li><li>• External daily fuel tank</li><li>• Trailer</li></ul>	<ul style="list-style-type: none"><li>• Fuel heater</li><li>• Fuel and water separator</li></ul>	<ul style="list-style-type: none"><li>• Temp. detector for winding and bearing</li><li>• PMG</li><li>• Antirust, mildew and salt fog treatment</li><li>• Anti condensation heater</li></ul>	<ul style="list-style-type: none"><li>• ATS</li><li>• Synchronization System</li><li>• Adjustable earth relay</li></ul>
Breaker	Fuel system	Lub-oil system	Cooling system
<ul style="list-style-type: none"><li>• ABB</li><li>• Schneider</li></ul>	<ul style="list-style-type: none"><li>• Low fuel level alarm</li><li>• Auto Fuel Pump</li><li>• T Valve</li></ul>	<ul style="list-style-type: none"><li>• Lub oil heater</li><li>• Temp.-sensor</li><li>• Oil drain Pump</li></ul>	<ul style="list-style-type: none"><li>• Elec.coolant Heater</li></ul>




# SPARTAN

Spartan UK | Spartan China | Spartan UAE  
Info@spartaneqp.com | www.spartaneqp.com

 Follow us @facebook.com/spartaneqp

 Follow us @linkedin.com/spartaneqp

 Follow us @spartaneqp

All information in the document is substantially correct at the time of printing but maybe subsequently altered by the company.

Distributed by



**ENGINEERING SUPPLIES LTD.**